


# FlexiForce®

## A201 Standard Force & Load Sensors

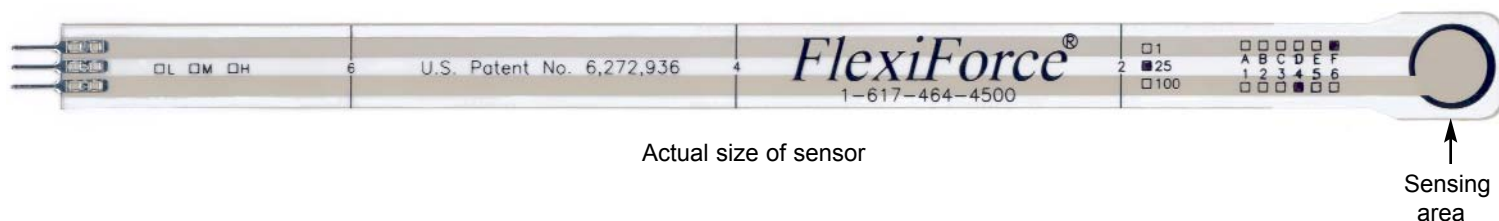

### Physical Properties

Thickness	0.008" (0.208 mm)
Length	7.75" (197 mm), <i>optional trimmed lengths: 6" (152 mm), 4" (102 mm), or 2" (51mm)</i>
Width	0.55" (14 mm)
Sensing Area	0.375" diameter (9.53 mm)
Connector	3-pin Male Square Pin (center pin is inactive)
Substrate	Polyester (ex: Mylar)


### Standard Force Ranges (as tested with circuit shown below)

- 0 - 1 lb. (4.4 N)
- 0 - 25 lb. (110 N)
- 0 - 100 lb. (440 N)\*

In order to measure forces above 100 lb (up to 1000 lb), apply a lower drive voltage and reduce the resistance of the feedback resistor (1kΩ min.)

#### Recommended Circuit

$$V_{out} = -V_T * (R_F / R_S)$$

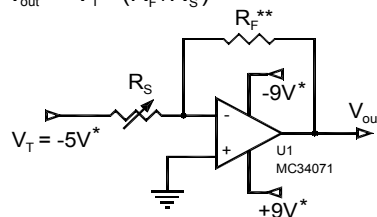

- \* Supply Voltages should be constant
- \*\* Reference Resistance  $R_F$  is 1kΩ to 100kΩ
- Sensor Resistance  $R_S$  at no load is > 5MΩ
- Max recommended current: 2.5 mA

### Typical Performance

Linearity (Error)	< ±5%
Repeatability	< ±2.5% of full scale
Hysteresis	< 4.5 % of full scale
Drift	< 3% per logarithmic time scale
Response Time	< 5 μsec

Operating Temperature 15°F - 140°F (-9°C - 60°C)\*  
*Ask about our High Temperature force sensor (model HT201)*

\*Force reading change per degree of temperature change = ±0.2%/°F (0.36%/°C)

\*For loads less than 10 lbs., the operating temperature can be increased to 165°F (74°C)

### Evaluation Conditions

Line drawn from 0 to 50% load  
 Conditioned sensor, 80% of full force applied  
 Conditioned sensor, 80% of full force applied  
 Constant load of 25 lb (111 N)  
 Impact load, output recorded on oscilloscope  
*Time required for the sensor to respond to an input force*